



# TECHNICAL DATA SHEET

BEAM ANKR MAX - BEAM MOUNTING BRACKET - p/n SFIBA-81012


## DESCRIPTION

The BEAM ANKR MAX is a between flange tension mounted bracket for a wide range of loads up to 310 lbs.

Adjustable to fit between beam flanges from 8 to 12". The mounting surface is pre-drilled and tapped for custom mounting and standard strut installation. Additional bracket plates are available for a number of OEM light fixtures and other loads.



## TECHNICAL DATA

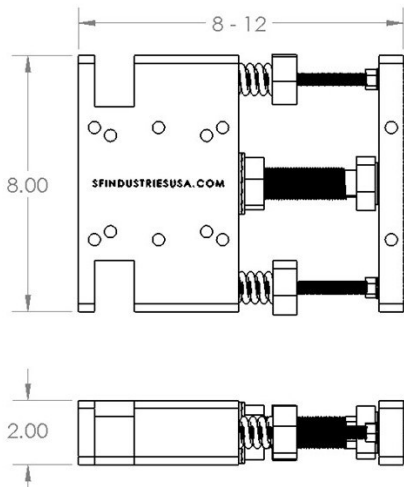

310 lb Load Rating

1200 lb Pull Out Force

Weight 8 lbs

Clamp Bolt Torque 105 ft lbs

3/8" Threaded Mounting  
Holes

## LOAD DATA

Table of max load by distance from BEAM ANKR mounting sur-

Distance (in)	2	4	6	8	10	12	14	16	18	20
Load (lbs)	310	186	133	103	84	71	62	55	49	44

## FEATURES

Anodized 6061 Aluminum

Knurled Gripping Surfaces

High Strength Clamping Bolt

High Torque Spring System

Fully Adjustable from 8-12"

No Drilling, Welding or Bolting

Simple Installation

Temporary or Permanent Applications

**SF INDUSTRIES**

1 979 421 9024

sales@sfindustriesusa.com

www.sfindustriesusa.com

1910 EAST TOM GREEN ST  
STE 1A

BRENNHAM TEXAS 77833